



DEADBOLTS

HEAVY-DUTY DEADBOLTS


40DBB SERIES • ANSI GRADE 1

A Heavy Duty commercial quality deadbolt that provides a maximum deterrent to forced entry. The cylinder recesses into the door to resist blows attempting to move the lock.


- 2-1/2" dia solid steel one-piece design security ring insert. exceeds ANSI Grade 1 security against hammer and crowbar prying attacks.
- 1" (25mm) deadbolt with hardened steel core exceeds ANSI Grade 1 Security against kick-in and saw attacks.
- High precision pick resistant solid brass 6 pin tumbler plug "C". Brass key Meets ANSI Grade 1 Security to prevent key cylinder from being knocked out.
- Drive in deadbolt - Designed to be installed on metal door conveniently. Only one hole is needed on door edge.
- ADA Ergonomic thumb turn.
- Extra thick steel mounting plate
- Sturdy, all steel latch case and mechanism.

- Finishes Available:
 - PB - Polished Brass
 - SB - Satin Brass
 - AB - Antique Brass
 - AC - Antique Copper
 - SN - Satin Nickel
 - SC - Satin Chrome
 - CR - Polished Chrome
 - ORB - Oil Rubbed Bronze
 - TB - Black Nickel
 - AN - Antique Nickel
 - PVD - Lifetime Finish

Drive in deadbolt

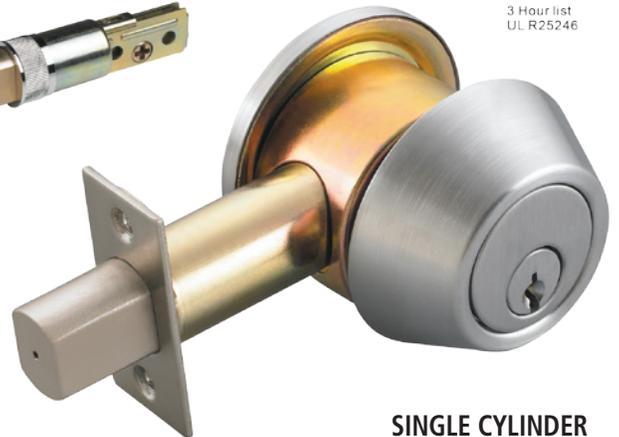

SINGLE CYLINDER
40DBBT



5 or 6 Pin
two-piece
cylinder




5 or 6 Pin
one-piece
cylinder




Inside Rose Assembly



Sturdy 2-1/2" dia molder
steel security ring insert



40DBKTS6
SINGLE CYLINDER



40DBKKS6
DOUBLE CYLINDER

Door Prep:	Cross bore 2-1/8" , Edge bore 1" Latch face 1"x2-1/4" .
Backset:	2-3/4" standard, 2-3/8" optional.
Door Thickness:	Adjustable 1-3/8" -- 2" .
Cylinder:	5-Pin or 6-Pin removable core. Schlage "C" keyway or Kwikset and other options available.
Face plates:	1"x2-1/4" square corner standard. Round corner and other options available.
Strikes:	1-1/8"x2-3/4" square corner standard. Round corner and other options available.
Bolt:	1" throw. Nickel plated.
ANSI/BHMA:	A156.5 Grade 1.